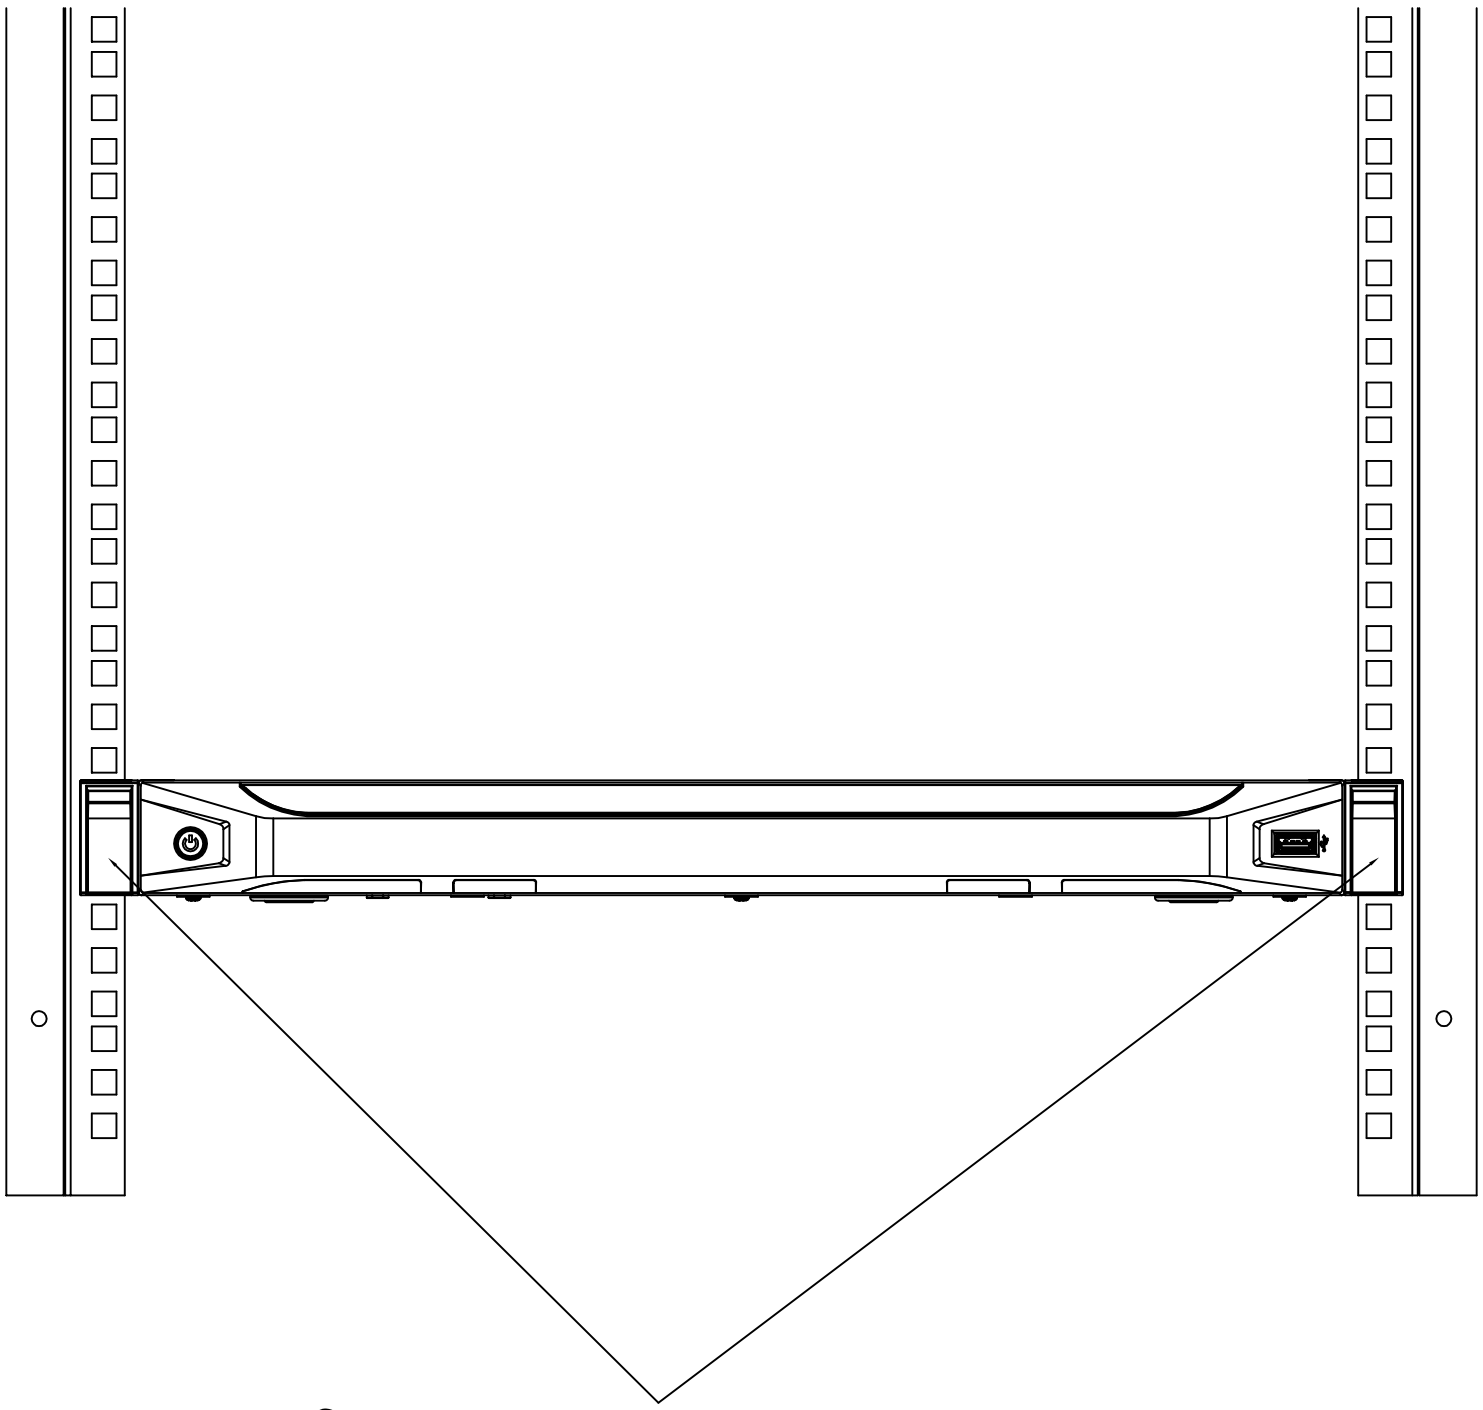


Attach the floating nuts to the bars with square holes,
and then fix the device to the bars with screws