
# DHI-LM43-F200N

## Dahua 43" FHD LED Monitor



- Light and cost-effective plastic housing.
- Suitable for continuous 24/7 operation.
- 178°H/178°V extra-wide viewing angle for overall viewing performance.
- High fidelity digital processing for a brilliant and vivid video
- 8 ms fast response time with no image blurring or ghosting.
- Supports multiple signal inputs such as HDMI, VGA and USB.
- Built-in speakers.
- Physical button and infrared remote dual control mode.
- Low energy consumption, long service life.




## Series Overview

The Dahua F200N Series monitor comes with a stunning 1080p resolution LCD panel and is engineered to deliver exceptional performance 24/7. Its lightweight plastic shell ensures ease of use. Furthermore, it seamlessly integrates with various Dahua backend security devices, making it an ideal choice for both desktop and wall mount installation in the security industry.

## Technical Specification

### Display

| | |
|---|---|
| Model | DHI-LM43-F200N |
| LCD Technology | IPS |
| Backlight | DLED |
| Screen Size | 43 inch |
| Aspect Ratio | 16:9 |
| Viewing Size | 940.896 (H) × 529.254 (V) mm |
| Screen-to-Body Ratio | ≥90% |
| Viewing Angle | 178° (H)/178° (V) |
| Display Mode | Horizontal |
| Pixel Pitch | 0.49005 mm × 0.49005 mm |
| Pixels Per Inch | 51.83 |
| Resolution | 1920 (H) × 1080 (V) |
| Refresh Rate | 60 Hz |
| Display Color | 8 bit |
| Color Gamut | 72% NTSC (typ.) |
| Brightness | 350 cd/m² (typ.) |
| Contrast Ratio | 1200: 1 |
| Response Time | 8 ms |
| Lifespan | 30,000 hrs |
| Operation Hours | 7 × 24 H |
| Surface Treatment | Haze 1%, 3H |

### Device Ports

| | |
|---|---|
| Input Port | 2 × HDMI 1.4 (1920 × 1080@60 Hz)<br>1 × VGA (1920 × 1080@60 Hz)<br>1 × USB 2.0<br>1 × Audio in |
| Output Port | 1 × Audio out |
| Speaker | 2 × 8 W |

### Power & Environmental Conditions

| | |
|---|---|
| Power Supply | 100–240 VAC (±10%), 50/60 Hz |
| Power Type | Built-in power |
| Power Consumption | 28 W (basic), 45 W (typ.), 75 W (max) |
| Standby Power Consumption | <0.5 W |
| Operating Temperature | 0 °C to +40 °C (+32 °F to +104 °F) |
| Operating Humidity | 10%–85% (RH), non-condensing |
| Storage Temperature | –20 °C to +60 °C (–4 °F to +140 °F) |
| Storage Humidity | 5%–90% (RH), non-condensing |

### General

| | |
|---|---|
| Product Dimensions | 954.7 mm × 559.4 mm × 85.8 mm (37.59" × 22.02" × 3.38") (W × H × D) (without base) |
| Package Size | 1044 mm × 644 mm × 142 mm (40.10" × 25.35" × 5.59") (W × H × D) |

| | |
|---|---|
| Frame Width | U/L/R/D: 1.2 mm/1.2 mm/1.2 mm/21.3 mm (0.05"/0.05"/0.05"/0.84") |
| Net Weight | 6.5 kg (14.33 lb) |
| Gross Weight | 8.9 kg (19.62 lb) |
| Casing Color | Black |
| Control Mode | Power button, Remote control |
| Status Indicator Light | Yes |
| Wall Mount VESA | 200 mm × 200 mm (7.87" × 7.87") |
| Accessory | Power cord, base, HDMI cable, remote control, user manual (QR code), QSG, legal and regulatory information etc. |
| Optional Accessory | Wall mount |


### Certification

| | |
|---|---|
| Certifications | CE EMC, CE LVD, CE ERP |

## Ordering Information

| Type | Model | Description |
|---|---|---|
| LED Monitor | DHI-LM43-F200N | Dahua 43" FHD LED Monitor |

## Dimensions (mm[inch])

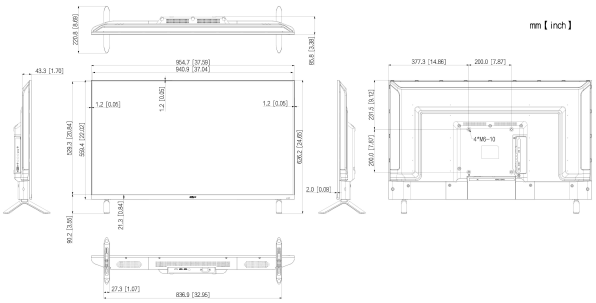



©Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.