dimax


# CABLE CONTRA INCENDIO 16AWG X 2C - LSZH

T010

| - Conductor: |
|---|
| 16AWG: Class 1 solid Copper |
| **- Insulation:** |
| HDPE (High-Density Polyethylene o Polietileno de Alta Densidad) |
| **- Core Identification:** |
| 2 cores: RED BLACK |
| **- Rip Cord** |
| Polyester Fibers |
| **- Outer Sheath** |
| LSZH |
| Sheath Colour: Red RAL3020 |
| **- Voltage Rating Uo/U:** |
| 300/300V |
| **- Temperature Rating:** |
| -20°C to +75°C |
| **- Minimum Bending Radius:** |
| 15 x overall diameter |
| **- Fire Power Limited Cable:** |
| Type FPLR |
| **- UL1424** |




16AWG X 2C - LSZH - UL

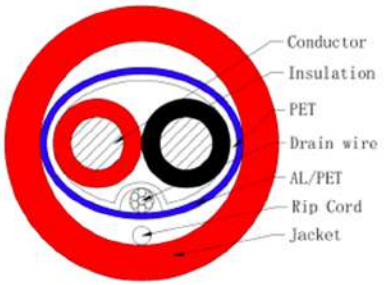


| Specification (AWG) | Jacket OD (mm) | Conductor DCR 20℃ Ohms/km |
|---|---|---|
| 2x16 UNSHLD | 4.75 | 13.5 |