# GABINETE 4U SOHO - 19" 450 MM - 246 MM

C749

## CARACTERÍSTICAS

- Gabinete 4U soho - 19"
- 450 mm profundidad - 246 mm altura
- Montable en pared
- Puerta frontal con cerradura
- 2 laterales desmontables
- Proteccion IP 20

| S/N | Specification | Qty | Material | Surface Finish | Remark |
|---|---|---|---|---|---|
| 1 | Front door | 1 | 5MM toughed glass door/ SPCC1.2 | Powder coated | ---- |
| 2 | Side panel | 2 | SPCC t1.0 | Powder coated | ---- |
| 3 | Frame | 1 | SPCC t1.2 | Powder coated | ---- |
| 4 | Mounting profile | 1 | SPCC t1.2 | Powder coated | ---- |
| 5 | Back panel | 1 | SPCC t1.0 | Powder coated | ---- |
| 6 | 19 " rails | 4 | SPCC t1.2/1.5 | Powder coated | <15U Thinkness : 1.2mm >=15U Thinkness:1.5mm |
| A | M6 screw& nuts | 10 | Steel | Color zinc | 20pcs for over 12U |
| B | Trox tooling | 1 | Steel | Black | ---- |




### Standard

- Comply with ANSI/EIA RS-310-D、IEC60297-2、DIN41494;PART1; DIN41494; PART7

### Material

- SPCC Cold Rolled Steel;
- Thickness: 19" rails: 1.2/1.5mm, side panel 1.0mm, others: 1.2mm


### Colour

- SA ■■■■0■■:RAL7035
- SA ■■■■1■■:RAL9004

### Loading Capacity

- Static loading: 60KG

| RU | Width(mm) | Depth(D)(mm) | Height(H)(mm) |
|---|---|---|---|
| 4 | 600 | 450 | 246 |
| | | 600 | |
| 6 | 600 | 450 | 370 |
| | | 600 | |
| 9 | 600 | 450 | 500 |
| | | 600 | |
| 12 | 600 | 450 | 635 |
| | | 600 | |

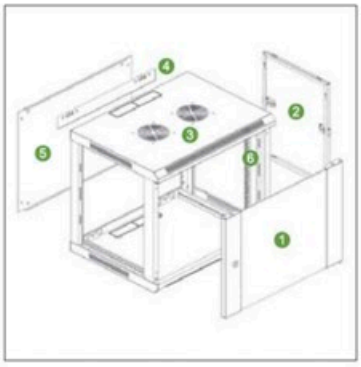


### Feature

- Welded frame, reliable structure;
- Standing or wall mounting installation;
- Adjustable feet and heavy duty castors are optional;
- Easy mounting installation（patent）;
- 19" standard installation;
- Removable side panels, side locks optional
- Cable entry on both of top cover and bottom panel;
- 120mm fan available;
- Turning angle of front door is over 180 degrees