dimax

UPS - 2000VA/1200W

Z029




CARACTERÍSTICAS

- Control inteligente de la CPU
- Reinicio automático mientras se recupera la corriente alterna
- Regulador de voltaje activo (AVR) con función de elevación y reducción para la estabilización del voltaje
- Función de arranque en frío y función de carga con el sistema apagado
- Paneles LED seleccionables, panel multicolor





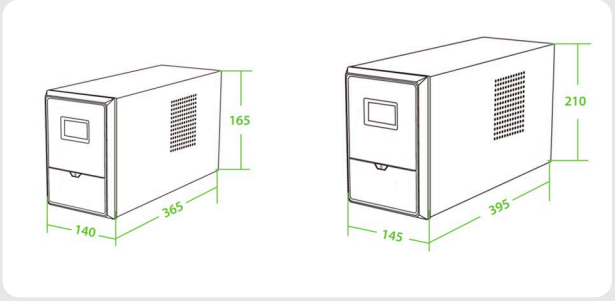

ESPECIFICACIONES

Model			Z029	Z030
Capacity	1200 VA/ 720 W	1500 VA/ 900 W	2000 VA/ 1200 W	3000 VA/ 1800 W
Input				
Voltage	110 V/120 VAC or 220/230/240 VAC			
Voltage Range	81 to 145 VAC or 145 to 275 VAC			
Power Factor	≥ 0.99 @ 100% Load			
Frequency	60/50 Hz (Auto sensing)			
Output				
Voltage	110/120 VAC or 220/230/240 VAC			
Voltage Range	± 10%			
Frequency Range (Battery Mode)	60/50 ± 1 Hz			
Transfer Time	4 to 6 ms			
Wave Form (Battery Mode)	Simulated Sine Wave			
Battery				
Battery Model & Quantity	12 V/7 AH × 2	12 V/9 AH × 2	12 V/9 AH × 2	12 V/9 AH × 4
Charge Time	8 hours recover to 90% capacity			
Protection				
Full Protection	Discharge, Short circuit, Overload protection			
Indicator				
LCD Display	AC mode, Battery mode, Load level, Battery level, Input voltage, Output voltage, Overload and low battery			
Battery Mode	Sounding every 4 seconds			
Low Battery	Sounding every second			
Overload	Sounding every second			
Fault	Continuously sounding			
Interface				
USB/R232 Port (Optional)	Support windows XP/Vista, Windows 7/8, Linux, Unix, and MAC			
Optional SNMP	Power management from SNMP management and web browser			
Environment				
Humidity	0-90% RH @ 0-40 °C (Non-condensing)			
Noise Level	Less than 40 dB			
Dimension (mm)	365 × 140 × 165	365 × 140 × 165	365 × 140 × 165	395 × 145 × 210
Weight (kg)	9.9	12.6	13.2	18.9