DS-D5024FN-B
23.8 inch Monitor



- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- User-friendly operation menu
- 1 channel HDMI 1.3 input interface
- Three image modes to adapt different environment
- Support software spread-spectrum technology to reduce EMI radiation
- VESA stand bracket


▪ Specification

Model		DS-D5024FN-B
Display	Screen Size	23.8 inch
	Active Display Area	527.04 mm (H) × 296.46 mm (V)
	Resolution	1920 × 1080 @60hz
	Backlight	E-LED
	Pixel Pitch	0.2745 mm (H) x 0.2745 mm (V)
	Brightness	250 cd/m²
	Viewing Angle	178° (H) / 178°(V)
	Color Depth	8 bit
	Contrast Ratio	3000 : 1
	Response Time	6.5 ms
	Refresh Rate	60 Hz
	Haze	25 %
	Reliability	7 × 24 H
	Color Gamut	72 %
Interface	Video & Audio Input	HDMI × 1, VGA × 1
	Video & Audio Output	Audio Out × 1
	Data Transmission Interface	NA
	Control Interface	NA
Power	Power Supply	19 VDC 1.31 A
	Power Consumption	≤ 23 W
	Standby Consumption	≤ 0.3 W
Working Environment	Working Temperature	0 ℃ to 40 ℃
	Working Humidity	20 % to 80 % RH (Non-Condensing)
	Storage Temperature	-20 ℃ to 60 ℃
	Storage Humidity	20 % to 80 % RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	100 mm × 100 mm, 4-M4 × 10 screw holes
	Bezel Width	2.5mm (top), 2mm (left/right), 17.3mm (bottom)
	Product Dimensions (W × H × D)	Without stand: 539.5 mm × 320.9 mm × 37.6 mm (21.24'' × 12.63'' × 1.48'') With stand: 539.5 mm × 425.6 mm × 174.6 mm (21.24'' × 16.76'' × 6.87'')
	Package Dimensions (W × H × D)	602 mm × 490 mm × 116 mm (23.70'' × 19.29'' × 4.57'')
	Net Weight	2.97 ± 0.5 kg (6.55 ± 1.10 lb.)
	Gross Weight	4.02 ± 0.5 kg (8.86 ± 1.10 lb.)
	Packing List	Power adapter × 1, power cable × 1,base bracket × 1, HDMI 1.5 m × 1, user manual × 1
	Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.

▪ Available Model


DS-D5024FN-B


▪ Physical Interface

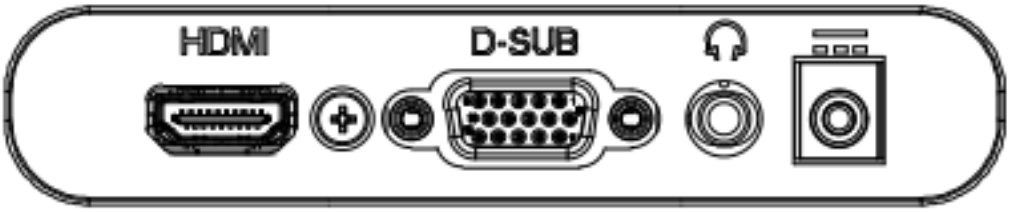



Interface	Description
HDMI	HDMI Input
D-SUB	VGA Input
Ω	3.5 mm Audio Output
DC 12V	12 VDC Input

▪ Dimension

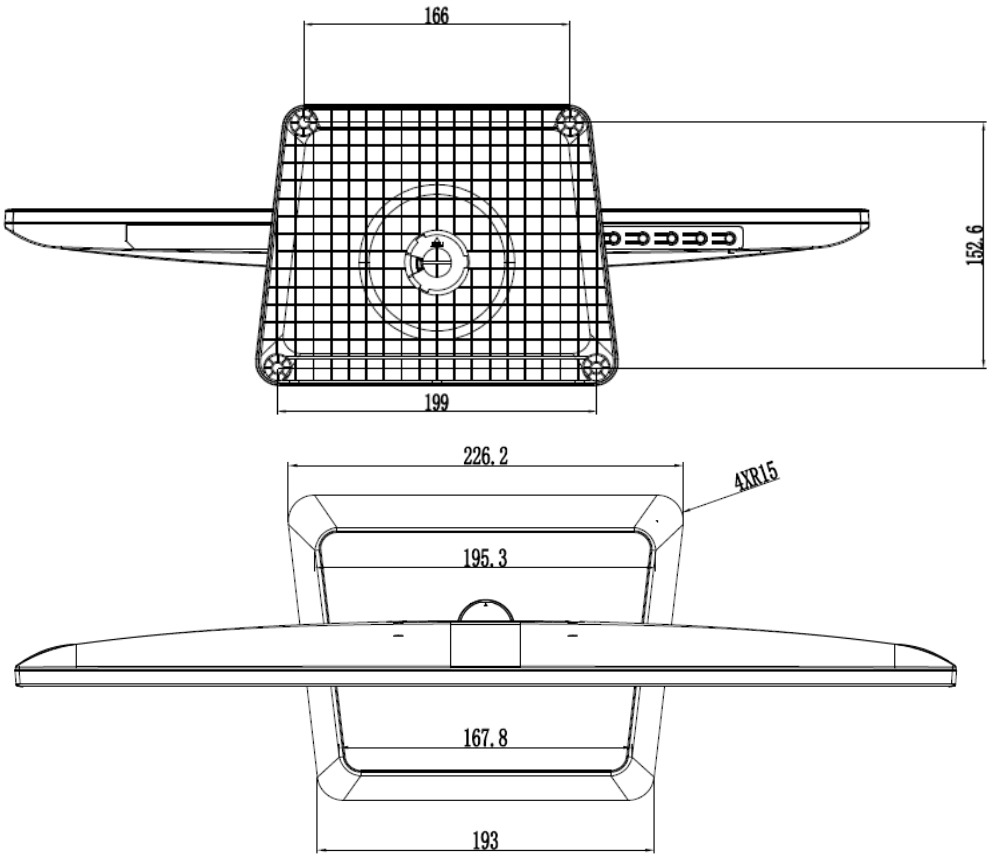

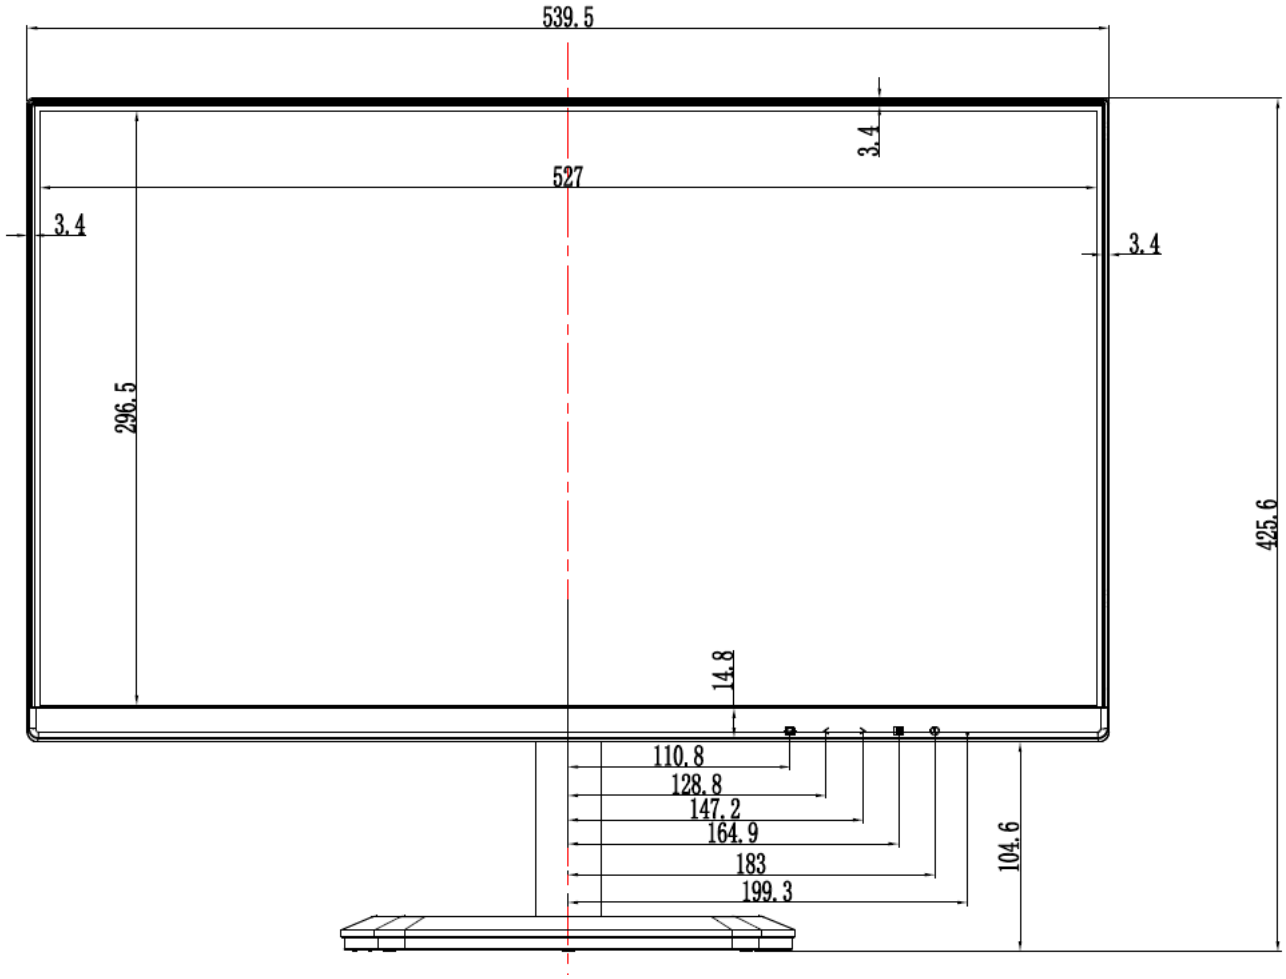
539.5
3.4
527
3.4
3.4
296.5
425.6
14.8
110.8
128.8
147.2
164.9
183
199.3
104.6

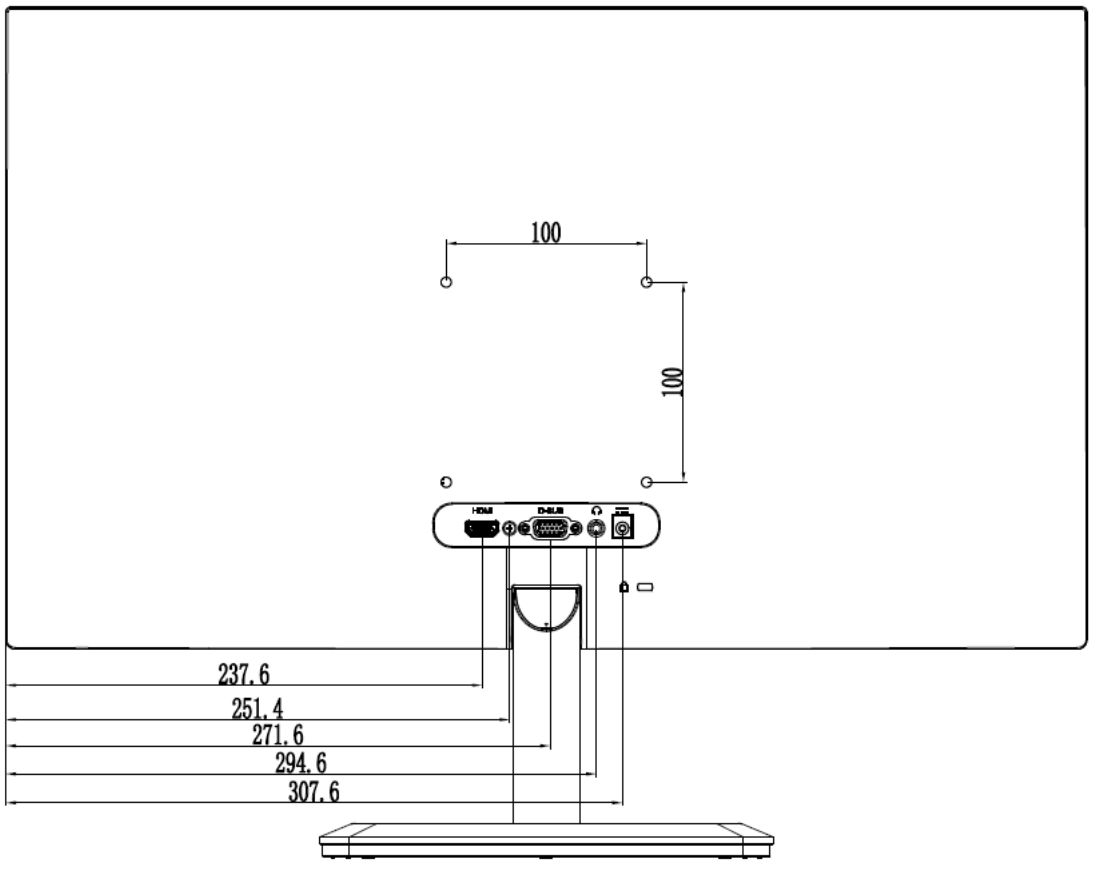
100
100
237.6
251.4
271.6
294.6
307.6

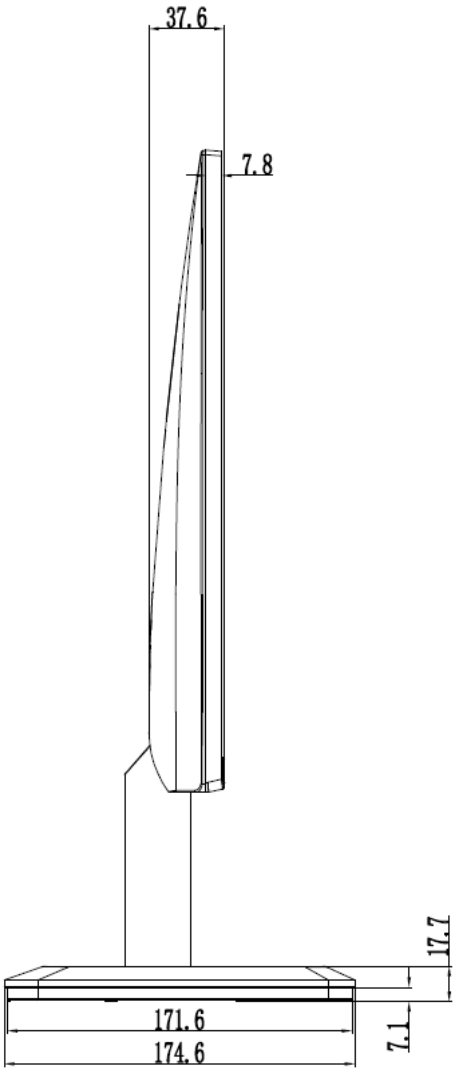

Distributed by

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |