dimax

Modelo: H369

Package Includes

1x Wi-Fi Switch Module
1x User Manual


Specifications


Type	Wi-Fi Switch Module
Model	
Power supply mode	Neutral+Live Wire
Rated Voltage	AC100-240V~50/60Hz
Max Load	LED 2X150W 2X10A
Wireless Frequency	2.4GHz
Wireless Standard	IEEE802.11 b/g/n
Size	40.3*43*22.5mm

Indicator light meaning

Indicator	Status	Discription
Blue light	Flash Rapidly (2 times per second)	Ready for connection (Default Mode Only)
Blue light	Flash Slowly (1 time every 3 S)	Ready for connection (AP Mode Only)


Product Diagram






Wiring Diagram

Compatible with 1 to 3-Way control lines

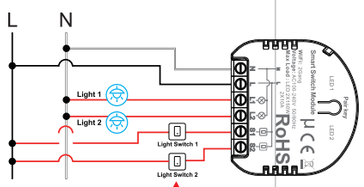


2 gang 1 Way Control

Note: When the controller has been installed, but power-on distribution network is failure. at this time, you can restore the factory settings through quick on/off S1 or S2 button 10 times total within 5 seconds

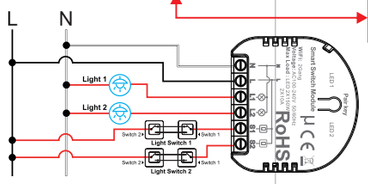

2 gang 2 Way Control

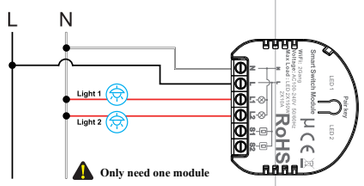

2 gang Without Switch

CAUTION
Please cut off the power before installation

Install the "Smart Life"APP

Download the "Smart life"

1.Download and launch the "Smart life" App form the App Store or Google Play. or scan the QR code below.
(*The free app"Smart Life" is compatible with mobile devices the support IOS8.0 above, Android 4.4 above*)

Smart life

GET IT ON Google Play

Download on the App Store

2.Create a new account.
3.Connect you mobile device to a 2.4GHz Wi-Fi network.
Note: This product only support 2.4G networks.

Setup Guide

Easy Setup

(a) In the app, select the【+】icon. (Figure 1)
(b) Select the device type 【Electrician】,and then tap【Switch(WI-FI)】(Figure 2)

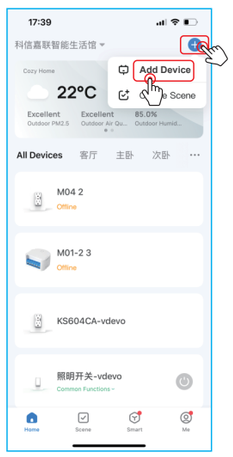


Figure 1


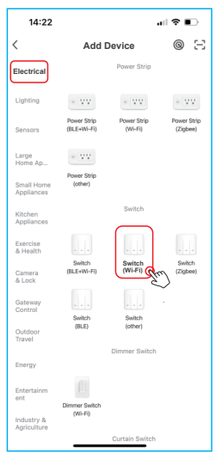



Figure 2

Blink Quickly(Recommend)



Button ON/OFF
Indicator light rapidly blinks (3 times per second)

Step 1.Enter pairing mode: long press the button until the indicator light Blink quickly




Step.2.Enter Wi-Fi password to join your network

Step.3 Power on the device and confirm Select " Blink Quickly"


Step4.Follow the prompts to complete the next step.

Blink Slowly (Alternative)



Button ON/OFF
Indicator light slowly blinks (1 time every 3 second)

Step 1.Enter pairing mode: long press the button until the indicator light Blink Slowly



Step.2.Enter Wi-Fi password to join your network

Step.3 Power on the device and confirm. Select "Blink Slowly"

Step4.Follow the prompts to complete the next step.

APP operation interface

